




**S P O R T  
C O U R T**

*ISO 9001:2008 Certified Company*  
**Manufacturer's Specifications**  
**Techlight Court Light**

<b>Pole Size:</b>	Bottom Pole: 4" x 4" x 7 gauge Top Pole: 4" x 4" x 11 gauge
<b>Pole Height:</b>	17' ½" above court surface
<b>Anchor:</b>	Provided: J-Bolt ¾" x 18" galvanized Optional: U-Bolt ¾" x 24" galvanized
<b>Overhang:</b>	Light fixture mounts directly to pole with an adjustable knuckle
<b>Light Fixtures:</b>	Single, Double Heads Available  <b>1000 Watt</b> (22" x 22" x 9.25") 120v/ 9.2 amps per fixture 208v/ 5.3 amps per fixture 240v/ 4.6 amps per fixture 277v/ 4.0 amps per fixture  <b>400 Watt</b> (16" x 16" x 6.75") 120v/ 3.7 amps per fixture 208v/ 2.1 amps per fixture 240v/ 1.9 amps per fixture 277v/ 1.6 amps per fixture  Fully adjustable fixtures Factory pre-wired at 240volts (Can be wired at 120v/ 208v/ 240v/ 277v)
<b>Color Rendering Index:</b>	65
<b>Color Temperature:</b>	4,000K
<b>Weights:</b>	Fixtures: 42 lbs (1000 Watt) 31 lbs (400 Watt) Arm: 12 lbs (Double Unit) Poles: 207 lbs
<b>Wind Load:</b>	80-140 mph (Single Assembly)

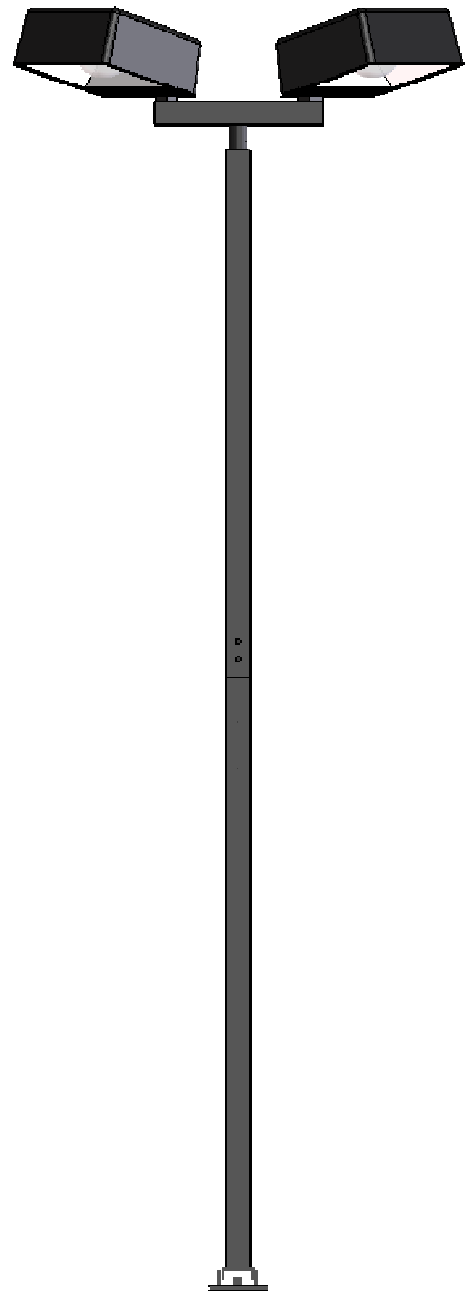



S P O R T  
C O U R T

*ISO 9001:2008 Certified Company*  
**Manufacturer's Specifications**  
**Techlight Court Light**

<b>Paint Process:</b>	Galvanized Powder coat
<b>Color:</b>	Black
<b>Net Hole Locations:</b>	Paddle Net            36" Badminton            61" Woman's Volleyball 88" Men's Volleyball    96"
<b>Internal Electrical Wiring:</b>	Accessible behind cover plate 10-gauge wiring
<b>Water Tight Construction Fixture:</b>	Heavy-duty die cast door with high temperature gasket Rated to 240° F Caps
<b>Optional Accessories:</b>	Light shields Electrical plug frame Ground fault plug receptacle
<b>Warranty:</b>	10 year limited warranty - poles 1 year warranty - fixtures 1 year warranty - base cover

